RIGID VINYL FLOORING




OAKA

WWW.OAKAFLOORS.COM

RIGID CORE VINYL STRUCTURE

RICID VINYL FLOORS

GLUELESS·INTERLOCKING·ELEGANT·COMFORT·LASTING

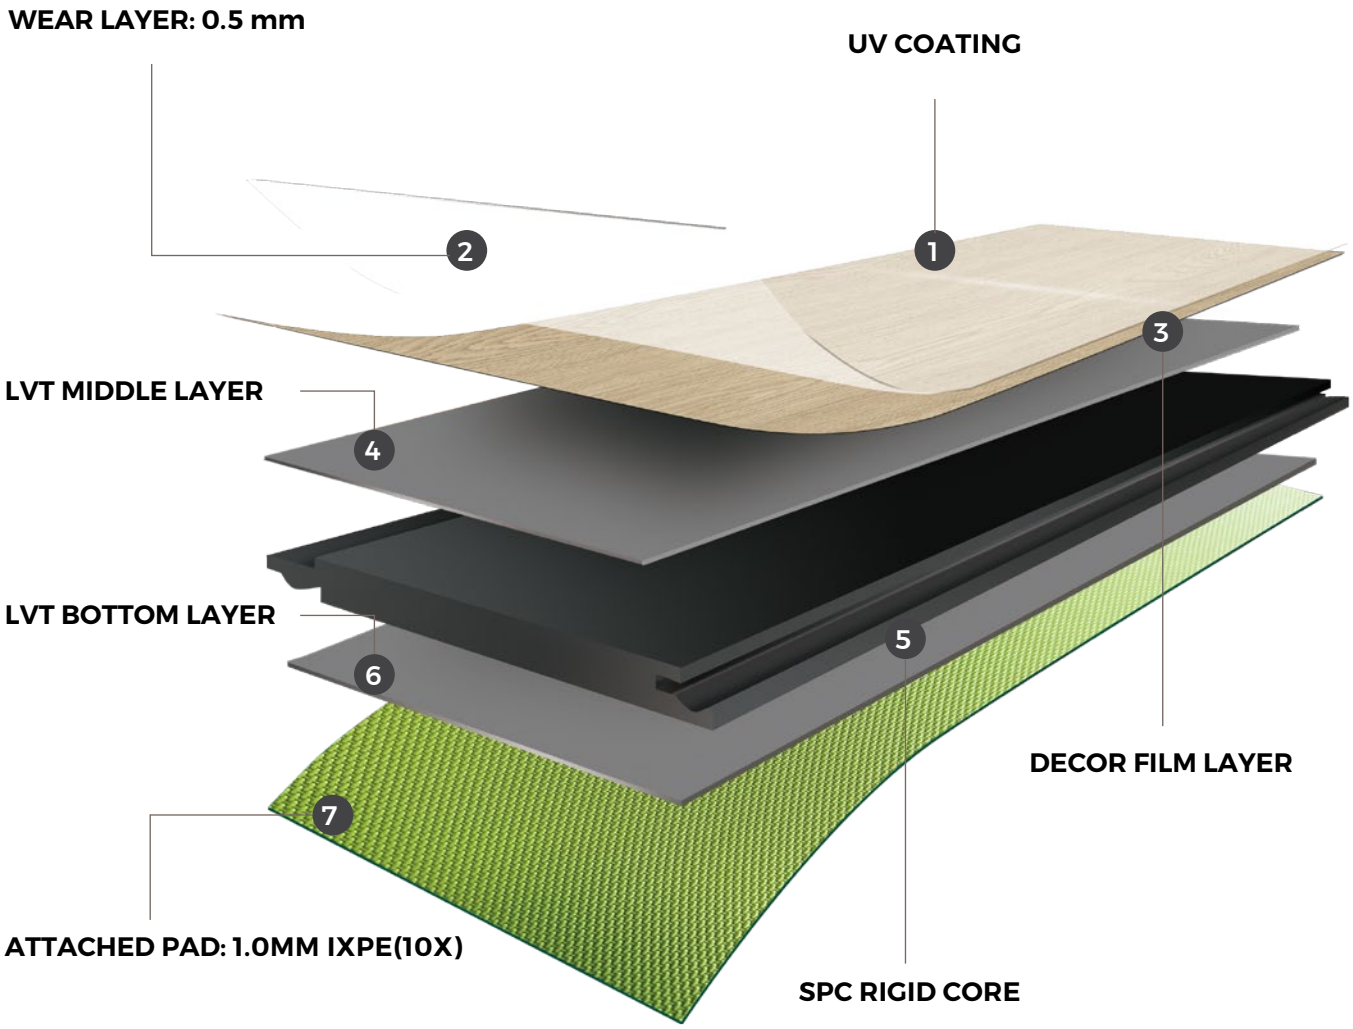

FEATURES & BENEFITS

- Superior Scratch & Stain Resistant
- No Bugs & Termites
- Click Installation No Adhesive
- 100% Waterproof
- Easy Clean
- Multiple Color Combinations
- Natural Looking Design
- Zero Maintenance
- Superb Dimensional Stability
- Endures Medium Foot Traffic
- Excellent Sound Insulation
- No Sub-Floor Required

APPLICATIONS

- Corporate Offices
- Residential
- Retail
- Hospitality


VEGAS


NEVADA


VALENCIA


WARSAW


IBIZA


BOMBAY


MELBOURNE


DETROIT


STOCKHOLM



RIGID VINYL FLOORS

PLANK SIZE: 180×1500×6.0MM

OAKA

RIGID VINYL FLOORS

SIZE: 180×1500 MM

TOTAL THICKNESS: 6.0 MM

WEARLAYER: 0.5 MM

ATTACHED PAD: 1.0 MM IXPE (10X)

PACKAGE: 8 PCS/BOX, 2.16 SQM/BOX

INTERLOCK: UNICLIC (UNILIN)



Vegas

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Vegas

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM

A



B



C



D



E



F



G



H



I



J



Vegas

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Nevada

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Nevada

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM

A



B



C



D



E



F



G



H



I



J



Nevada

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM

OAKA



Valencia

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Valencia

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM

A



B



C



D



E



F



G



H



I



J



Valencia

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Warsaw

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Warsaw

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM

A



B



C



D



E



F



G



H



I



J



Warsaw

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Ibiza

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Ibiza

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM

A



B



C



D



E



F



G



H



I



J



Ibiza

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Bombay

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Bombay

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM

A



B



C



D



E



F



G



H



I



J



Bombay

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Melbourne

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM

OAKA



Melbourne

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM

A



B



C



D



E



F



G



H



I



J



Melbourne

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Detroit

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Detroit

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM

A



B



C



D



E



F



G



H



I



J



Detroit

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Stockholmv

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



Stockholm

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM

A



B



C



D



E



F



G



H



I



J



Stockholm

5.0 plus 1.0 mm IXPE(10X)

180 x 1500 MM



RIGID VINYL FLOORS

PLANK SIZE: **110×610×6.0MM**

OAKA

RIGID VINYL FLOORS

SIZE: 110×610 MM

TOTAL THICKNESS: 6.0 MM

WEARLAYER: 0.5 MM

ATTACHED PAD: 1.0 MM IXPE (10X)

PACKAGE: 20 PCS/BOX, 1.342 SQM/BOX

INTERLOCK: UNICLIC (UNILIN)


VEGAS


NEVADA


IBIZA


MELBOURNE


DETROIT


STOCKHOLM


TROMSØ



Vegas

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



OAKA

RIGID VINYL HERRINGBONE

WWW.OAKAFLOORS.COM

Vegas

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM

Plank: AAA

Plank: BBB

A

B

C

D

E

F

G



Vegas

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



Nevada

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



OAKA

RIGID VINYL HERRINGBONE

WWW.OAKAFLOORS.COM

Nevada

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM

Plank: AAA

Plank: BBB

A

B


C

D

E

F

G

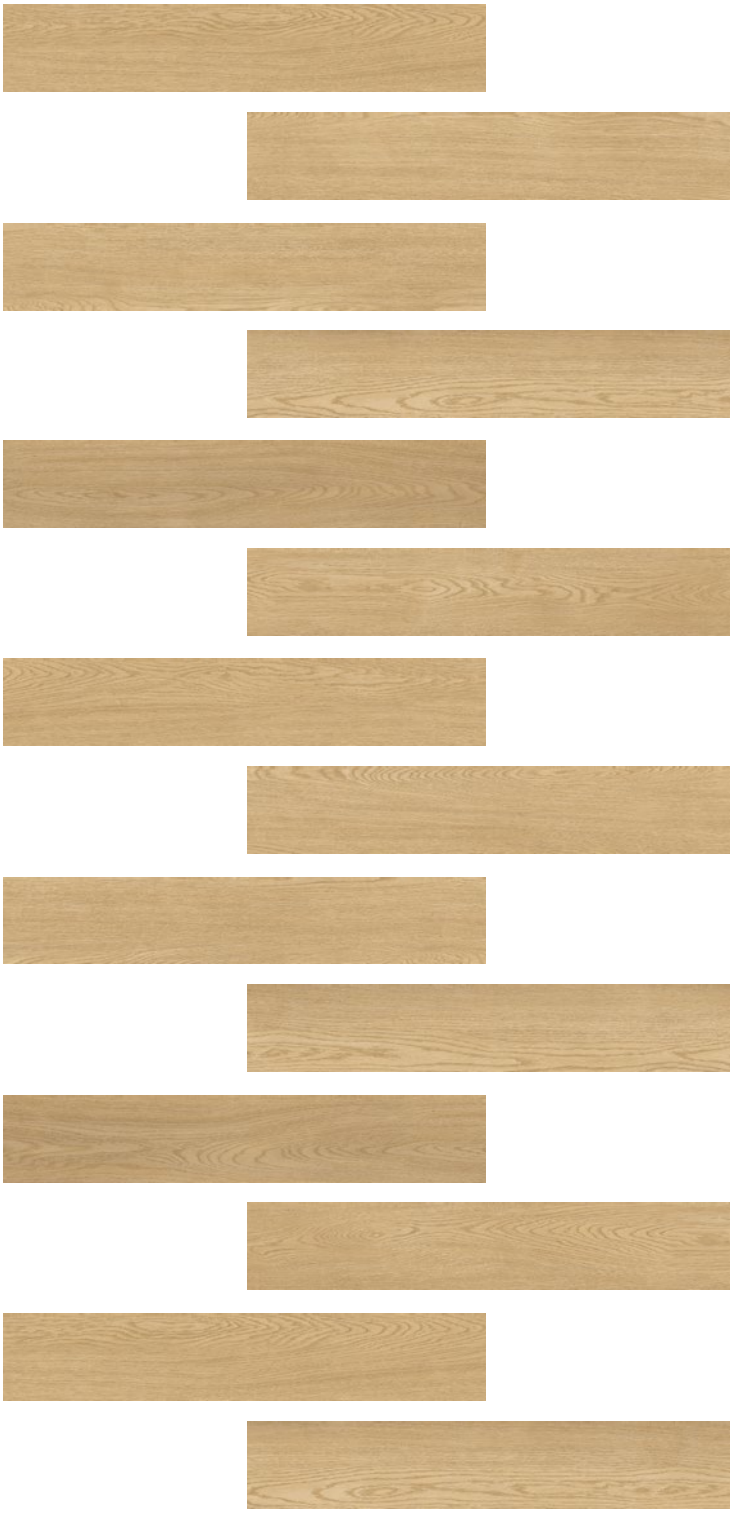

Nevada

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



Ibiza

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



OAKA

RIGID VINYL HERRINGBONE

WWW.OAKAFLOORS.COM

Ibiza

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM

Plank: AAA

Plank: BBB

A

B

C

D

E

F

G



Ibiza

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



Melbourne

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



OAKA

RIGID VINYL HERRINGBONE

WWW.OAKAFLOORS.COM

Melbourne

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM

Plank: AAA

Plank: BBB

A



B



C



D



E



F



G



Melbourne

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



Detroit

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



OAKA

RIGID VINYL HERRINGBONE

WWW.OAKAFLOORS.COM

Detroit

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM

Plank: AAA

Plank: BBB

A



B



C



D



E



F



G



Detroit

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



Stockholm

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



OAKA

RIGID VINYL HERRINGBONE

WWW.OAKAFLOORS.COM

Stockholm

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM

Plank: AAA

Plank: BBB

A

B

C

D

E

F

G



Stockholm

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



Tromsø

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



OAKA

RIGID VINYL HERRINGBONE

WWW.OAKAFLOORS.COM

Tromsø

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM

Plank: AAA

Plank: BBB

A

B

C

D

E

F

G



Tromsø

5.0 plus 1.0 mm IXPE(10X)

110 x 610 MM



RIGID VINYL FLOORS

CHEVRON SIZE: 125×625×6.0MM

OAKA

RIGID VINYL FLOORS

SIZE: 125×625 MM

TOTAL THICKNESS: 6.0 MM

WEARLAYER: 0.5 MM

ATTACHED PAD: 1.0 MM IXPE (10X)

PACKAGE: 20 PCS/BOX, 1.563 SQM/BOX

INTERLOCK: Valinge 5G


VEGAS


IBIZA


MELBOURNE



Vegas

5.0 plus 1.0 mm IXPE(10X)

125×625 MM



OAKA

RIGID VINYL CHEVRON

WWW.OAKAFLOORS.COM

Vegas

5.0 plus 1.0 mm IXPE(10X)

125×625 MM

Plank: AAA

Plank: BBB

A

B

C

D

E

F

G



Vegas

5.0 plus 1.0 mm IXPE(10X)

125×625 MM



Ibiza

5.0 plus 1.0 mm IXPE(10X)

125×625 MM



OAKA

RIGID VINYL CHEVRON

WWW.OAKAFLOORS.COM

Ibiza

5.0 plus 1.0 mm IXPE(10X)

125×625 MM

Plank: AAA

Plank: BBB

A

B

C

D

E

F

G



Ibiza

5.0 plus 1.0 mm IXPE(10X)

125×625 MM



Melbourne

5.0 plus 1.0 mm IXPE(10X)

125×625 MM



OAKA

RIGID VINYL CHEVRON

WWW.OAKAFLOORS.COM

Melbourne

5.0 plus 1.0 mm IXPE(10X)

125×625 MM

Plank: AAA

Plank: BBB

A

B


C

D

E

F

G

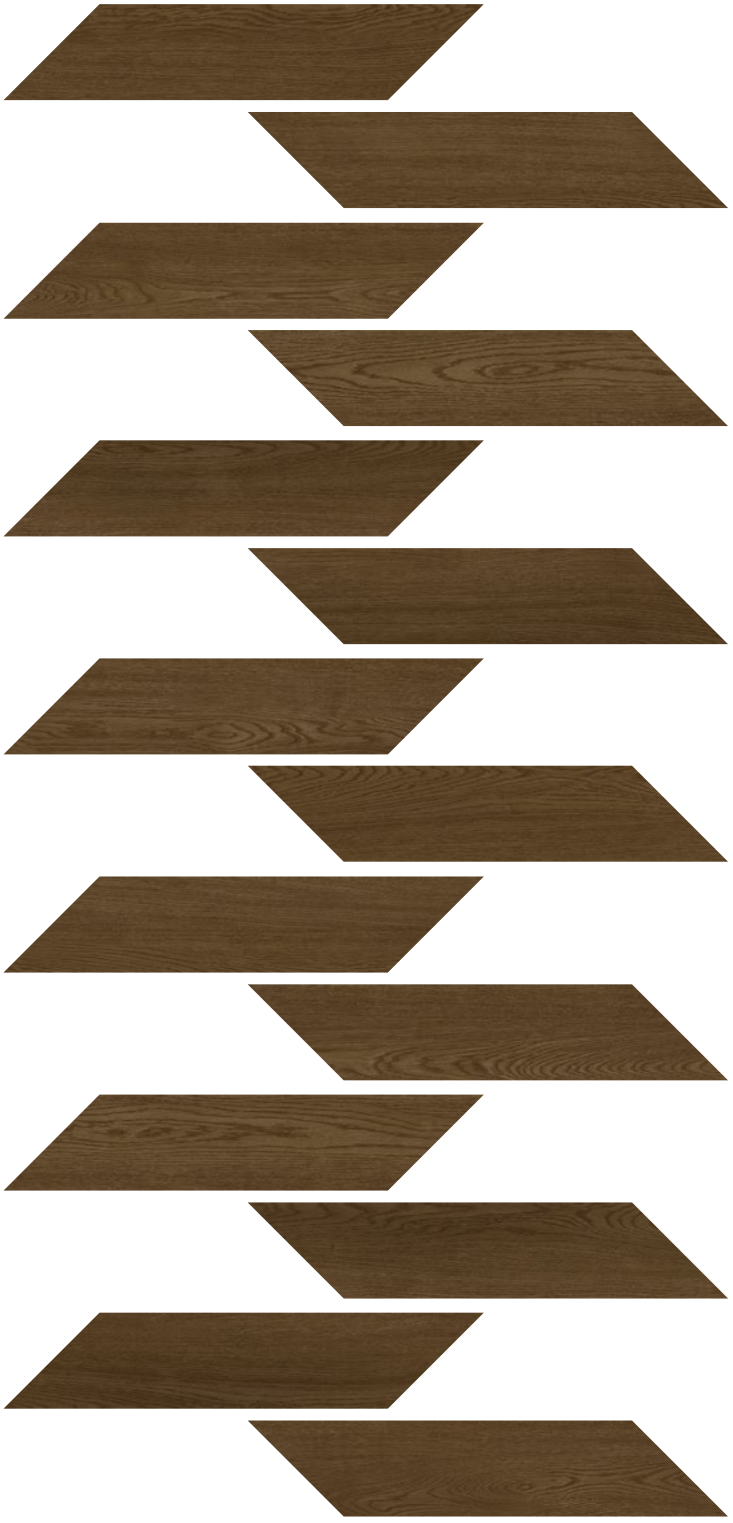

Melbourne

5.0 plus 1.0 mm IXPE(10X)

125×625 MM

TECHNICAL DATA SHEET

RIGID VINYL FLOORS

GLUELESS·INTERLOCKING·ELEGANT·COMFORT·LASTING

CHARACTERISTICS	STANDARD	GENERALLY USED
Size		Plank Size: 180×1500×6.0 mm Herringbone Size: 110×610×6.0 mm Chevron Size: 125x625x6.0 mm
Total Thickness	ISO 24346	6.0 mm 5.0mm ABA+1.0mm IXPE
Density		1.80-1.95g/cm³
Wear layer	ISO 24340	0.5 mm
Micro-scratch resistance	EN 16094	MSR-B2
Squareness	ISO24342:2018	Max ⩽0.15mm
Straightness	ISO24342:2018	Max ⩽0.15mm
Classification	ISO10582	23,31/33, 42/34,43
Dimensional stability	ISO23999:2021	⩽0.12%
Curling	ISO23999:2021	⩽1.0mm
Residual indentation	ISO24343-1:2007	⩽0.10mm(without IXPE)
Light stability	ISO105-B02:Method 3	⩾6
Fire resistance	EN13501-1	Bf1-S1
Slip resistance	DIN 51130 EN 13893	R10 DS
Wear resistance	EN660-2	Group P
Peel resistance	ISO24345:2006	⩾75N/50mm
Sound Transmission Class	ASTM E413-22	STC=62
Impact Insulation Class	ASTM E989-21	IIC=63 △IIC=23
Determination of resistance to stains chemical resistance	ISO26987:2008	No change in surface dulling, surface attack, or staining was detected
Castor chair	ISO4918: 2016	After 25000 cycles, test specimens no visible damage
Soluble heavy metal contents test	ASTM F 963-11	Free
Formaldehyde emission	EN717-1: 2004	Free
Utilization		Recyclable



Slip Resistant



Fire Resistant



Ecological


Abrasion Resistant


Antistatic


Chemical Resistant


Silent


UV Ray Resistant



Impact Resistant


Waterproof









OAKA

WWW.OAKAFLOORS.COM



ACCESSORIES

Accessories

Skirting70
T-Moulding
Reducer
L-Line
Skirting Covering



Skirting70

Size: 2400*70*12 mm
Packing: 10 pcs/box


T–Moulding

Size: 2400*35*7 mm
Packing: 25 pcs/box

Reducer

Size: 2400*35*9 mm
Packing: 25 pcs/box



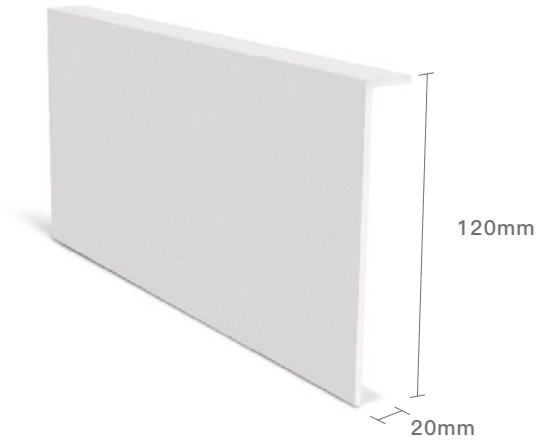

L–Line

Size: 2400*30*30 mm
Packing: 25 pcs/box

Skirting Covering

Size: 2400*120*20mm
Packing: 10 pcs/box





INDIA

Tele : +91 99983 55360

E-mail: sales@oakafloors.com

Website: www.oakafloors.com

Adress: GF-7, Binori Aarna, Behind Raj Thaal Restaurant, SP Ring Road, Ahmedabad

UAE

Tele : +971 04 665 2211

E-mail: sales@oakafloors.com

Website: www.oakafloors.com

Adress: Office 103, Level 3 Offices, Oasis Mall, Sheikh Zayed Road, Al Quoz, Dubai